

## COPPER STALK LUGS

Material : 99.9% pure copper  
 Operating Temperature : Up to 155°C  
 Tensile Strength : 200 MPa  
 Ductile Rating : 40%  
 Oxygen Content : 30ppm  
 Compliance : AS/NZS 4325-1, RoHS, REACH




*\*All dimensions in millimetres unless specified*

Part Number	Nominal Conductor (mm <sup>2</sup> )	d	D	L	L1	L2	d1	Type
CTSL70-10	70	11.5	14.3	77	24	40	10	B
CTSL70-12	70	11.5	14.3	77	24	40	12	A
CTSL95-10	95	13.5	17.4	80	27	40	10	B
CTSL95-12	95	13.5	17.4	80	27	40	12	B
CTSL120-10	120	15.5	20.6	82	30	40	10	B
CTSL120-12	120	15.5	20.6	82	30	40	12	B
CTSL150-10	150	16.5	22.5	89	30	45	10	B
CTSL185-10	185	18.5	24.2	92	32	45	10	B
CTSL185-12	185	18.5	24.2	92	32	45	12	B
CTSL185-16	185	18.5	24.2	92	32	45	16	B
CTSL240-16	240	21.5	28.2	103	38	50	16	B
CTSL240-18	240	21.5	28.2	103	38	50	18	B
CTSL300-16	300	23.5	31.3	107	42	50	16	B
CTSL300-18	300	23.5	31.3	107	42	50	18	B



**TYPE A**

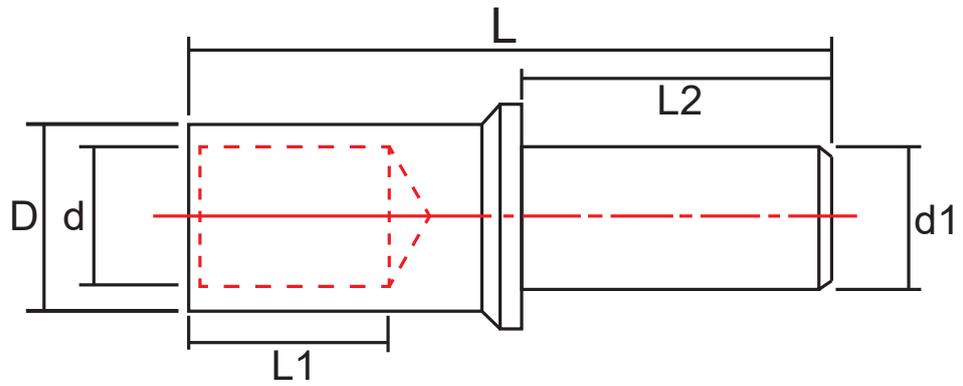

**TYPE B**

